

1.2 Round Pressure Cover

from 10/-1 bar


Standard design

- Wetted materials: 1.4571 or 1.4404
Attachment parts: 1.4301
- Collar nuts (not capped)
- Silicone gasket
- Without hinge, with two handles on the lid
- Neck length 150 mm, Neck thickness 6 mm
- Surface: unpolished, glass-bead blasted; from NW600 unpolished, pickled
- With approval (Modul G) acc. PED 97/23/EC
- Design Code: AD-2000-Merkblatt



Options

- Wetted materials: 1.4435 BN2, 1.4539, 1.4529, 1.4462, 1.4429, HC-22, HC-276, HC-2000, etc.
- With hinge (if possible)
- Intermediate sizes
- Various gasket qualities
- Various surface qualities (glass-bead blasted, pickled or polished up to $R_a < 0,2 \mu\text{m}$)
- Neck length up to 2000 mm, neck thickness up to 20 mm
- Conical design of the neck (up to max. 8 mm neck thickness)
- Neck shaped to match tank-diameter
- Cover side swiveling
- Various handles: stainless steel handle, toggle, nuts etc.
- With wedge for side installation
- Locking pin in open position
- Springassists (torsion-, disc-, or gaspring)
- Installation of nozzles (sightglasses, TC-Ferrules (DIN32676), HZ-Connect, etc.)
- With various limit- or proximity-switches
- With safety-grill or safety-cross
- Attachment parts in other materials
- Various Design Codes: ASME VIII-1, EN13445, ...
- Optional with ASME-Approval Sec. VIII-1, latest Edition (additional surcharge, design-changes possible)

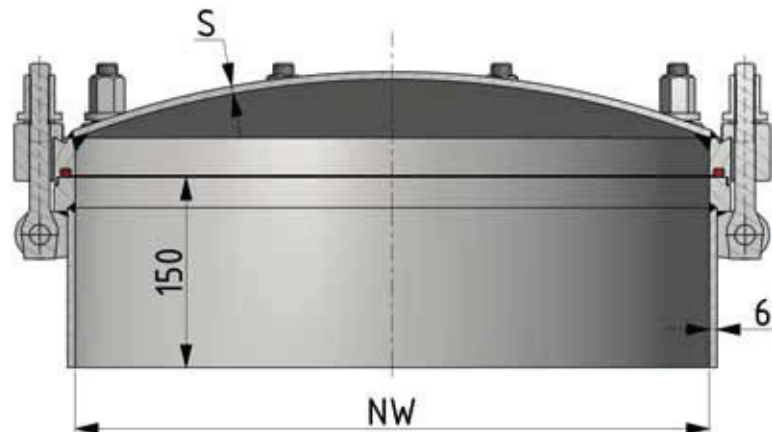

zimmerlin
EDELSTAHL-TECHNIK



Zimmerlin GmbH
Edelstahl-Technik
Frohmatenstr. 19
D-79268 Bötzingen

Tel. +49(0)7663-6088-0
Fax +49(0)7663-6088-88
info@zimmerlin.de
www.zimmerlin.de

Stand: Juni 2015



Article No.	NW	MAWP [bar]	max. temperature [°C]	Number of screws M16	Total height [mm]	Radius of head [mm]	S for 1.4571	Weight [kg]	Price in EUR
20102004	100	10	200	4	175	flat	24	9	
20142004	100	40	200	4	175	flat	24	10	
21502004	150	10	200	4	175	flat	24	13	
21542004	150	40	200	4	175	flat	24	14	
22102004	200	10	200	4	175	flat	24	19	
22252006	200	25	200	6	175	flat	24	20	
22402008	200	40	200	8	175	flat	24	22	
22502004	250	10	200	4	175	flat	24	24	
22552008	250	25	200	8	175	flat	24	27	
22502010	250	40	200	10	175	flat	24	29	
23102006	300	10	200	6	200	500	6	23	
23161508	300	16	150	8	200	500	10	27	
23251010	300	25	100	10	200	500	12	29	
23502006	350	10	200	6	215	500	6	28	
23560508	350	16	50	8	215	500	10	33	
23505012	350	25	50	12	215	500	12	40	
24102510	400	10	250	10	230	500	6	33	
24161512	400	16	150	12	230	500	8	41	
24250516	400	25	50	16	230	500	12	47	
24501012	450	10	100	10	240	500	6	39	
24560514	450	16	50	14	240	500	10	48	
25101012	500	10	100	12	255	500	6	45	
25150516	500	16	50	16	255	500	8	55	
25200520	500	20	50	20	255	500	8	62	
26100514	600	10	50	14	285	500	6	52	
26160522	600	16	50	22	285	500	8	65	
27100520	700	10	50	20	295	700	8	87	
27160530	700	16	50	30	295	700	10	104	
28100524	800	10	50	24	300	800	8	115	
28121036	800	12	100	36	300	800	10	133	
29100530	900	10	50	30	320	900	10	139	
21100538	1000	10	50	38	340	1000	10	161	

Gaskets see chapter 9.1



Stand: Juni 2015

Tel. +49(0)7663-6088-0
 Fax +49(0)7663-6088-88
 info@zimmerlin.de
 www.zimmerlin.de

Zimmerlin GmbH
 Edelstahl-Technik
 Frohmattenstr. 19
 D-79268 Bötzingen

