

# THERMAL PROCESSING

## MDV systems for surface-mix burners



**MDV gas metering systems for the flexible production and flow control of fuel gases, oxygen or air; especially designed for surface-mix burners.**

### Benefits

- the flexible arrangement of metering valves (2 or 3 gases) provides the flexibility to meet the gas supply requirements of various types of processing machinery
- subsequent changes of machine parameters, e.g. capacities or number of burners, can be easily accomplished because of the modular design
- all parameters can be adjusted with the burners in sight due to the installation of the metering valves close to the burners
- the perfect repeatability of the parameter setting enables the initial setting of the burners before actually starting the process. This results in reduced set-up times as well as in minimised cost of rejects during start-up.


- low assembly cost due to very convenient assembly of mixing and metering valves without any additional pipe work, brackets or housings
- integrated WITT safety technology to prevent dangerous flashbacks or back burns into the gas supply system protecting life and equipment

**Please indicate the individual gases as well as number and capacities of the required burners when ordering!**

<b>Type</b>	MDV Systems for Surface-Mix Burners	<b>Gas connections</b>	dependent on valve block size
<b>Gases</b>	fuel gases such as natural gas, methane, propane, hydrogen, acetylene with oxygen and/or air	<b>Material</b>	aluminium, brass, stainless steel
<b>Mixing range</b>	dependent on the gases	<b>Weight</b>	dependent on number of valves
<b>Gas inlet pressures</b>	0.3 to max. 10 bar	<b>Dimensions (HxWxD)</b>	dependent on number of valves
<b>Gas outlet pressures</b>	dependent on the back pressure of the burners	<b>Shut-off valves</b>	solenoid valves, 24 V DC or 230 V AC
<b>Flow capacity (air)</b>	approx. 10 NI/min to 1,000NI/min (other quantities on request)	<b>Approvals</b>	Company certified according to ISO 9001 CE-marked according to: - EMC 2004/108/EC - Low Voltage Directive 2006/95/EC
<b>Repeatability</b>	better $\pm 1\%$ abs.		

**FLOW CALCULATION OF DIGIVOE-VALVES**

Characteristic curve

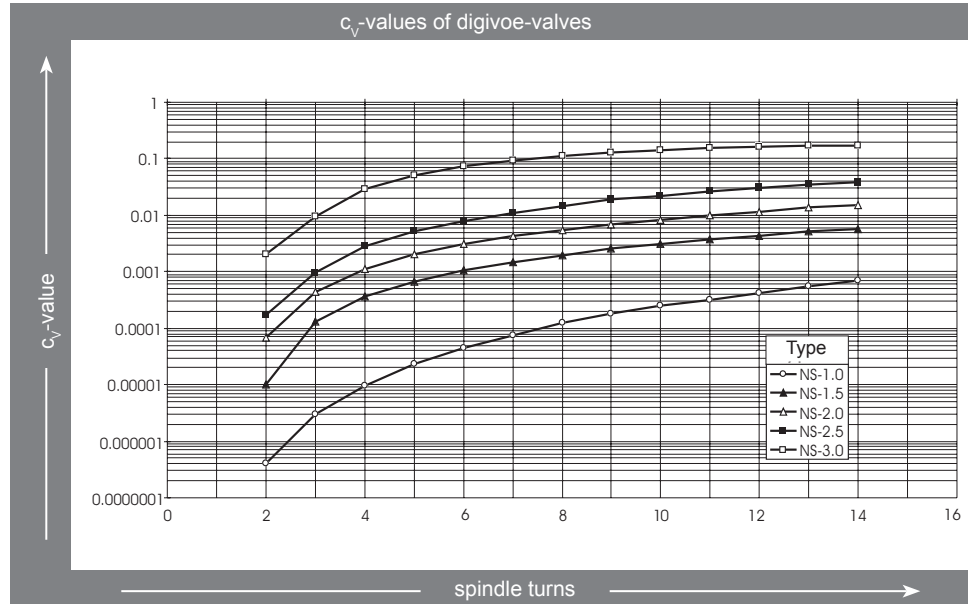

**Formulas**

Pressure drop	Gas flow in Nm <sup>3</sup> /h
$\Delta P < \frac{P_v}{2}$	$Q_n = \frac{C_v \cdot 514}{\sqrt{\rho_n \cdot \vartheta_n} \cdot \sqrt{\Delta P \cdot P_h}}$
$\Delta P > \frac{P_v}{2}$	$Q_n = \frac{C_v \cdot 257 \cdot P_v}{\sqrt{\rho_n \cdot \vartheta_n}}$

Symbol	Description	Unit
Q <sub>n</sub>	Gas flow	Nm <sup>3</sup> /h
K <sub>v</sub>	Flow coefficient from curve	Nm <sup>3</sup> /h
ΔP	Pressure drop = P <sub>v</sub> -P <sub>h</sub>	bar
P <sub>v</sub>	Inlet pressure	bar absolute
P <sub>h</sub>	Outlet pressure	bar absolute
ρ <sub>n</sub>	Density at norm conditions: 0 °Celsius, 1013 hPa	Kg/Nm <sup>3</sup>
ϑ <sub>n</sub>	Gas temperature upstream the valve	Kelvin

**Sectional drawing**

