


MALE BRANCH TEES

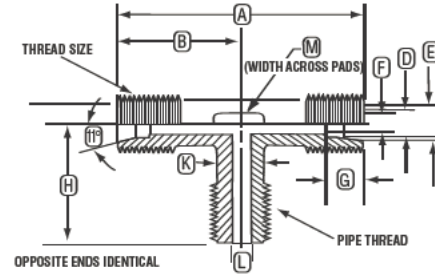

SPECIFICATIONS

Tube O.D.	Pipe Thd.	Thread	A	B	D +.005/ .010	E	F	G	H	K	L	M
			± 1/64	± 1/64			± 1/64	± 1/64	± 1/64	± 1/64	± 1/64	± 1/64
1/4	1/8	7/16-20	1-29/64	47/64	.250	.330 - .335	.170	15/32	3/4	3/8	1/4	3/8
1/4	1/4	7/16-20	1-15/32	47/64	.250	.330 - .335	.170	15/32	59/64	3/8	5/16	3/8
5/16	1/4	1/2-20	1-39/64	13/16	.312	.380 - .385	.232	31/64	63/64	7/16	9/32	7/16
3/8	1/4	5/8-20	1-15/16	31/32	.375	.460 - .465	.250	19/32	1-1/16	9/16	5/16	9/16
3/8	3/8	5/8-20	1-29/32	61/64	.375	.460 - .465	.250	19/32	1-3/32	1/2	3/8	1/2
1/2	3/8	3/4-20	2-13/64	1-7/64	.500	.590 - .595	.375	11/16	1-5/32	43/64	25/64	43/64
1/2	1/2	3/4-20	2-7/32	1-1/8	.500	.590 - .595	.375	11/16	1-21/64	5/8	31/64	39/64
5/8	1/2	7/8-20	2-17/32	1-1/4	.625	.715 - .720	.500	45/64	1-7/16	13/16	1/2	13/16
3/4	1/2	1-1/16-20	3-7/64	1-9/16	.750	.860 - .865	.625	13/16	1-41/64	1-1/16	9/16	1-1/16
3/4	3/4	1-1/16-20	3-7/64	1-9/16	.750	.860 - .965	.625	13/16	1-41/64	1-1/16	11/16	1-1/16
7/8	3/4	1-3/16-16	3-3/32	1-35/64	.875	.995 - 1.000	.750	7/8	1-5/8	1-3/16	11/16	1-3/16