

C6


Automatic Case Gluers




- Flaps folded in line
- Guaranteed squaring of the case
- Extensive size range capability

C6

Automatic Case Gluers

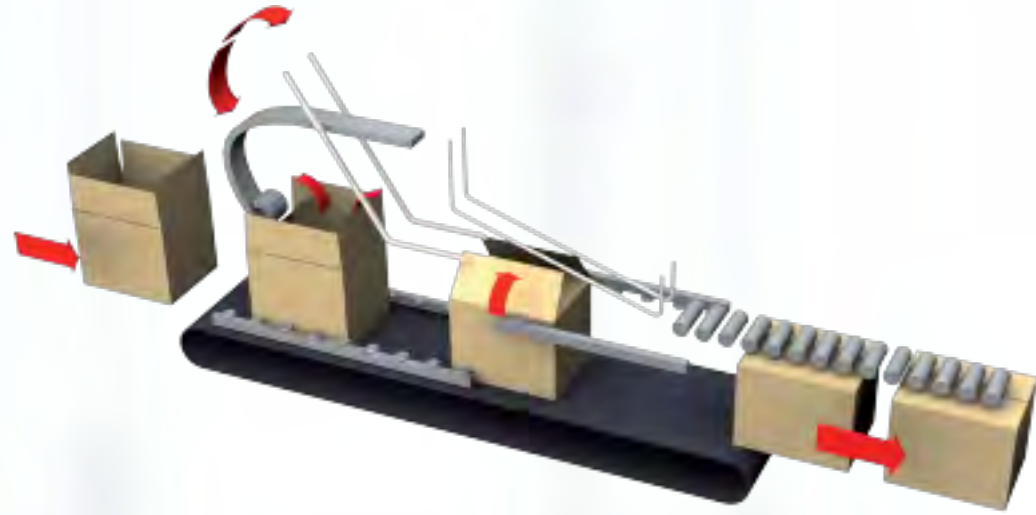

Top flap gluing

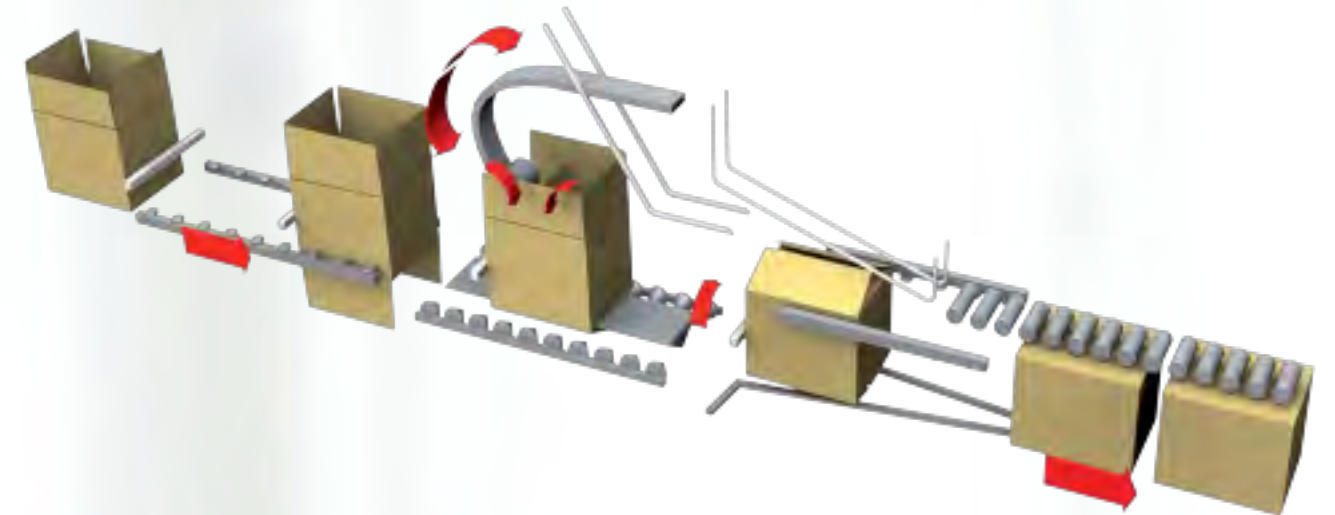

Top and bottom flap gluing



A case flap gluing solution to meet your specific requirements:

■ ADVANTAGES

- Internal flaps precisely folded by a fixed guide and an articulated arm, then evenly glued
- External flaps folded progressively
- Pressure applied evenly to the sealed case

■ ERGONOMICS

- Compact machine
- Continuous case transfer
- Extensive size range
- Versatile layout

■ PERFORMANCE

- Robust design
- Quick size changeovers
- Speed: 100 cases/min
- Option: rotating folding arm for high speeds

	Speed	Case Length	Case Width	Case Height	Conveyor	Sealing
		L	B	H		
C641.20/40 Min/Max	30 to 55 c/min	200/350-550	150/350	150/360	Band	Top flaps only
C642.20 Min/Max	26 to 50 c/min rotating arm	120/350	102/270	130/360	Flight bars	Top flaps only
C642.40 Min/Max	23 c/min	200/550	150/350	150/360	Flight bars	Top flaps only
C644.20 Min/Max	26 c/min	180/300	150/350	130/360	Flight bars	Top/bottom flaps
C644.40 Min/Max	23 c/min	200/550	150/350	150/360	Flight bars	Top/bottom flaps
C651.30/40 Min/Max	20 to 55 c/min	185/420	125/320	180/350	Band	Top flaps only
C681.40 Min/Max	50 c/min per lane	200/550	150/350	150/360	BandDual lanes	Top flaps only

First in line

Cermex
87, route de Seurre - B.P.3 - 21910 Corcelles-lès-Cîteaux - France
Tél. : +33 (0) 380 707 100

Gebo Cermex Headquarters
Rue du Commerce, CS 73455 Reichstett - 67455 Mundolsheim - France
Tél. : +33 (0) 388 183 850

■ contact.us@gebocermex.com

■ www.gebocermex.com

